

Pill-Mate/Event-Reminder

- For all pill-taking schedules.
- Unlimited number of pill bottles can be connected to the unit.
- Choice of AC adaptor and 2 AA batteries. Batteries also used as power failure backup when using AC adaptor.
- Useful for other events as well.



Press the button of your choice and the start button, you are all set!
See instructions below for details.

About Osun's Pill-Mate/Event-Reminder


Our Pill-Mate/Event-Reminder uses both visual and audible alarms to remind users at the pre-set time to take medicines or attend events. It has 5 settings:

1. 4 times/day, every 4 hours, skip night; samples are 8am, 12am, 4pm, 8pm; or 8pm, 8am, 12pm, and 4pm.
2. 3 times/day, every 6 hours, skip night; samples are 8am, 2pm, 8pm; or 8pm, 8am, and 2pm.
3. 2 times/day, every 12 hours, skip night; samples are 8am and 8pm.
4. 1 time/day, every 24 hours; sample is 8am or 8pm.
5. 1 time/week; sample is 8am, Sunday.

If you select the start time at 7am or 7pm, then the rest of time will also be one hour earlier than the suggested time. You can go to opposite direction and start later than the suggested time as well.

This device uses button switches for the different choices, and uses buzzer and LEDs (light emitted diodes) to indicating the status of the timing and alarm.

User Instructions

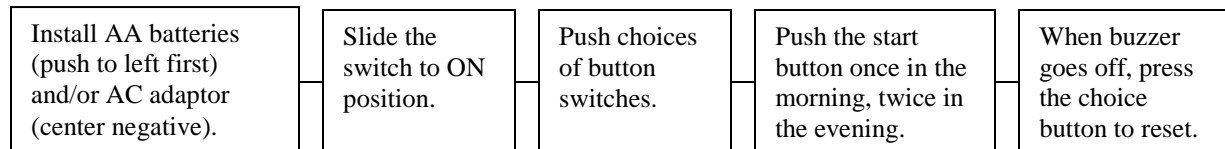

1. Install two fresh AA batteries (push one battery to the left of the battery compartment first, and insert the negative end of the second battery to the right side of the compartment, then press them down) and/or plug in the AC adaptor (center positive). Pay attention to the polarity when installing it.
2. Sort out your pill bottles according to the time schedule (how many times a day) and cascade them to the corresponding choices of the control unit using color stickers.
3. Slide the switch to ON position. The power on LED will be on and the buzzer will sound once.
4. Users can choose 1 to 5 of the choices by pushing the corresponding button switches. The green LED will be flashing. Toggling the switch will turn on and off the choice alternatively.
5. Use the start button to initiate the setup procedure. For starting in the morning, the buzzer will sound once; and if you would like to start in the evening, press the start button once more, the buzzer will sound second time. The LEDs by the choice buttons will go out. The system starts counting. The power LED will be flashing slowly (6 seconds) indicating the system is working.
6. When scheduled time comes up the buzzer will go off and LEDs on the selected choices will be flashing to remind you to take those medicines. After you finish taking the medicines push the choice button switch once to reset the timing. Notice that the buzzer is shared by all choices. Only all choice buttons are reset the alarm will go off completely and the cycle continues.
7. It is recommended that you use an AC adaptor at home. Otherwise, when batteries are low, the power LED will be flashing fast (1 second). Replace the batteries. It is recommended that you connect the AC adaptor first to avoid losing the settings, or change the batteries at the setup time, e.g., either at 8am or 8pm, and reset the schedule.
8. Turn the switch off after use. This will prolong the battery life.
9. We suggest that you write down the quantity of pills you need to take every time on the stickers to complete the whole automatic process. Once the setup is done all you need for pill taking is ready. You will never miss a dosage.

Specifications and Warranty

Power: 3 V batteries or AC adaptor (sold separately), output 3V. Current: about 15mA. One year warranty.