


Pace-Alert Instruction Manual

Model PA0010

Package Contents: 1 Pace-Alert, 1 Instruction Manual. (Note: Battery is not included)

Thank you for purchasing OSUN Pace-Alert! Osun Pace-alert is the first that detects AC electrical, high frequency, and AC magnetic fields and alarms when the field strength is beyond the recommended pacemaker/ICD threshold. The pre-set threshold was set up based on pacemaker manufacturer's specifications and includes enough margins to give early warning before the sources actually interference with the pacemakers/ICD. Please read this manual in its entirety to fully enjoy the benefits and features of the product.

Overview Features

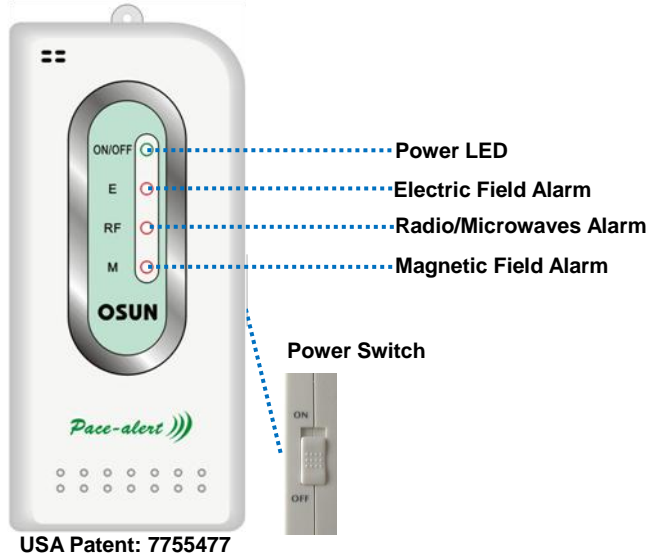

Install Battery

- Slide the battery compartment cover open and install a fresh 9V battery.
 - Connect the battery to battery snap holder, and keep the holder's wire lead underneath the battery. Replace the battery compartment cover.
- Replace the battery with a fresh one when continuous use for more than 20 hours, or the display starts fading or when the device stops functioning.



Please dispose of old or defective batteries in an environmentally safe way and in accordance with your local laws and regulations.

Operation

- Slide the power switch up to turn the device on. The green power LED should be on. If no lights are on, check the battery.
- Use the unit to test all the electrical devices and the appliances in your home or office environment to identify areas with potentially dangerous high field strength. Leave the unit on when you go to new places.
- Turn the switch off after use.

Annual Calibration

Osun Technologies LLC provides annual calibration service for Osun Pace-Alert. For more information please visit FAQ section at www.osuntech.com.

Specifications

E: Detect AC Electrical field from power line, fluorescent lights, improperly grounded equipment. Alarm goes off when the strength is higher than 4KV/m.

RF: Detect Radio Frequency/Microwave from cell phones, microwave ovens, and other RF devices. Alarm goes off when the strength is higher than 2.65 mW/cm².

M: Detect AC Magnetic field from power lines, TVs, computers, AC alarm clocks, and house appliances. Alarm goes off when the strength is higher than 1.5G.

LED	Threshold	Calibrated	Frequency Range
E	4KV/m	55 Hz	30Hz – 5KHz
RF	2.65 mW/cm ²	2.45GHz	500KHz - 5.5GHz
M	1.5 Gauss	55 Hz t	30Hz – 5KHz

Dimension	Weight	Power	Current
13.4 x 6 x 2.6 cm	3.2oz (91 g)	9V Battery	30 mA

LIMITED ONE YEAR WARRANTY

OSUN TECHNOLOGIES LLC (OSUN) warrants that all products it manufactures to be of good material and workmanship and to be free of defects if properly installed and operated for a period of one year from date of purchase. REMEDY FOR BREACH OF THIS WARRANTY IS EXPRESSLY LIMITED TO REPAIR OR REPLACEMENT OF DEFECTIVE ITEMS. Any product which, under normal use and service, is proven to breach the warranty contained herein within ONE YEAR from date of sale will, upon examination by OSUN, and at its sole option, be repaired or replaced by OSUN. In all cases, transportation costs and charges for returned goods shall be paid by the purchaser. OSUN hereby disclaims all responsibility for such transportation costs and charges. This warranty will not be breached, and OSUN will give no credit for products it manufactures which shall have received normal wear and tear, been damaged, tampered, abused, improperly installed, damaged in shipping, or repaired or altered by others than authorized representatives of OSUN.

THE ABOVE-DESCRIBED WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND ALL OTHER WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTY OF MERCHANTABILITY AND THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. OSUN EXPRESSLY DISCLAIMS ALL LIABILITY FOR SPECIAL, CONSEQUENTIAL OR INCIDENTAL DAMAGES, WHETHER ARISING IN TORT OR BY CONTRACT FROM ANY BREACH OF THIS WARRANTY. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. OSUN FURTHER DISCLAIMS ALL LIABILITY FROM PERSONAL INJURY RELATING TO ITS PRODUCTS TO THE EXTENT PERMITTED BY LAW. BY ACCEPTANCE OF ANY OF OSUN'S EQUIPMENT OR PRODUCTS, THE PURCHASER ASSUMES ALL LIABILITY FOR THE CONSEQUENCES ARISING FROM THEIR USE OR MISUSE. NO PERSON, FIRM OR CORPORATION IS AUTHORIZED TO ASSUME FOR OSUN ANY OTHER LIABILITY IN CONNECTION WITH THE SALE OF ITS PRODUCTS. FURTHERMORE, NO PERSON, FIRM OR CORPORATION IS AUTHORIZED TO MODIFY OR WAIVE THE TERMS OF THIS PARAGRAPH, AND THE PRECEDING PARAGRAPH, UNLESS DONE IN WRITING AND SIGNED BY A DUTY AUTHORIZED AGENT OF OSUN.

For in-warranty repair, please contact Osun Technologies:

703-996-3028, service@osuntech.com or visit: www.OsunTech.com for more information